



ESL 55 - 12 FT

12V - 55 Ah



Art.-Nr. 2011069

Electrical specifications

Nominal Voltage		12 V
Capacity 25°C to 1,8V/c	20 hour rate	59,4 Ah
	10 hour rate	56,1 Ah
	8 hour rate	54,4 Ah
	3 hour rate	43,8 Ah
	1 hour rate	36,2 Ah
Self discharge @ 25°C	per month	2,5 - 3 %
Internal Resistance	fully charged	9,6 mΩ
Impedance	fully charged	633 S
Maximum current	charging	8 A
Charge Voltage @25°C	Float (-3mV/°C/c)	2,25 - 2,29 V/Cell
Charge Voltage @25°C	Cyclic (-5mV/°C/c)	2,37 - 2,40 V/Cell


Other specifications

Design Floating Life @20°C	12 Years
Dimensions LxWxH (± 2mm)	277x105x223 mm
Total height	223 mm
Operating Temperature (storage)	-20 to +50 °C
Separator	Absorbent Glass Mat
Grid alloy	Calcium / Tin lead alloy
Case and cover	ABS
Electrolyte	Sulphuric Acid
Terminal / Length	M6 insert
Optional terminal types	none
Torque setting	8 Nm
Weight	17,7 (±5%) kg

Innovative Features

- Completely maintenance free, sealed construction eliminates the need for adding water
- Fully tank formed plates
- Analytical grade electrolyte
- Spill proof / leak proof
- Valve regulated Max internal pressure 2,5 psi
- Multi-position usage
- ABS Case and cover
- Low self discharge
- FAA and IATA approved as non-hazardous
- Built to comply with IEC 8962, DIN 43534, BS 6290 Pt4, Eurobat

Dimensions

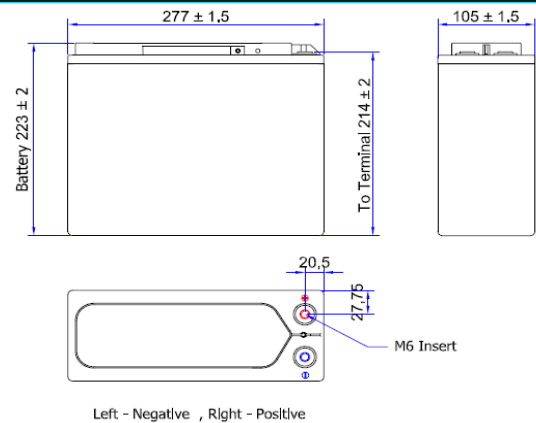

Constant Amps discharge - Amps at 25°C

V/Cell	5min	10min	15min	20min	25min	30min	35min	40min	45min	50min	55min	60min	90min	2h	3h	4h	5h	6h	7h	8h	9h	10h	12h	20h
1,80	123	90,0	73,0	70,0	62,0	58,1	53,3	49,4	46,3	43,7	41,4	36,2	24,5	19,4	14,6	11,5	9,79	8,50	7,60	6,80	6,20	5,61	4,80	2,97
1,75	136	97,0	79,0	72,5	64,0	59,5	54,5	51,0	48,0	44,8	42,5	36,3	26,6	19,9	15,0	11,6	9,90	8,50	7,60	6,80	6,20	5,61	4,80	2,97
1,70	149	104	84,0	75,0	67,0	61,0	56,0	52,0	49,0	45,9	43,6	36,9	26,7	20,4	15,1	11,8	9,90	8,60	7,60	6,80	6,20	5,61	4,80	2,97
1,65	162	111	89,0	77,5	69,0	62,5	57,5	53,0	50,0	47,0	44,8	36,9	26,8	20,8	15,2	12,0	10,0	8,60	7,70	6,90	6,20	5,61	4,90	2,97
1,60	175	118	94,0	80,0	71,0	64,0	59,0	54,0	51,0	48,0	46,0	36,9	26,9	21,3	15,3	12,1	10,1	8,70	7,70	6,90	6,20	5,72	4,90	3,08

Constant Power Discharge - Watts/Cell at 25°C

V/Cell	5min	10min	15min	20min	25min	30min	35min	40min	45min	50min	55min	60min	90min	2h	3h	4h	5h	6h	7h	8h	9h	10h	12h	20h
1,80	254	156	132	129	115	110	101	93,4	87,9	83,0	78,7	70,0	46,5	36,8	28,0	22,1	19,4	16,8	14,9	13,5	12,2	11,1	9,70	6,16
1,75	273	162	141	132	120	113	103	90,0	90,0	85,3	80,5	70,6	47,6	37,5	29,5	22,4	19,6	16,9	15,0	13,5	12,2	11,2	9,70	6,16
1,70	292	176	151	137	124	116	106	94,7	92,2	87,3	82,5	70,6	48,8	38,5	29,6	22,6	19,7	16,9	15,0	13,5	12,2	11,3	9,80	6,27
1,65	311	190	161	142	128	118	108	98,7	94,5	89,3	84,5	70,7	50,0	39,5	29,7	22,8	19,8	17,0	15,1	13,6	12,2	11,4	9,80	6,27
1,60	330	204	171	147	132	121	111	103	96,7	91,3	86,5	71,0	51,2	40,5	29,4	23,2	19,9	17,1	15,1	13,6	12,3	11,6	9,80	6,38

Revision: 201512-1

Your Wing Dealer :



Swiss Point AG | Moospark 10 | 6221 Rickenbach
distributed by Tel. +41 62 721 82 82 | info@swiss-point.ch
www.swiss-point.ch