

Basic Specifications

Voltage:	12 Volt
Capacity:	20 hour rate: 28.4Ah 10 hour rate: 28Ah 5 hour rate: 26Ah
Design life:	12 years
Appr. dimensions:	167x177x125mm (LxWxH) (±2mm)
Terminal:	M5
Container & lid:	Flame retardant ABS
Internal Resistance:	8mΩ (Fully charged)
Approximate weight:	8.4kg
Max charge current:	8.4A
Max discharge current:	420A (5 sec.)
Operating temp. range:	-20°C ~ +50°C
Self discharge:	lower than 3% per month

Typical Applications

- UPS / Emergency Power
- Evacuation system
- Security systems
- Traffic systems
- Data center
- Telecommunication
- Hospitals

Discharge data in Watts per cell (20°C)

	(V/cell)	5 Min	10 Min	15 Min	30 Min	1 Hr	3 Hr	5 Hr	10 Hr	20 Hr
End Voltage	1.80V	248	137	98.1	57.8	34.8	14.1	9.64	5.29	2.71
	1.75V	263	146	104	61.5	37.0	15.1	10.3	5.63	2.88
	1.70V	269	149	107	62.8	37.8	15.4	10.5	5.75	2.95
	1.65V	273	151	108	63.6	38.3	15.6	-	-	-
	1.60V	275	152	109	64.2	38.7	15.7	-	-	-

Discharge data in Amperes (20°C)

	(V/cell)	5 Min	10 Min	15 Min	30 Min	1 Hr	3 Hr	5 Hr	10 Hr	20 Hr
End Voltage	1.80V	102	63.3	47.1	28.4	17.0	7.12	4.79	2.61	1.36
	1.75V	108	67.3	50.1	30.2	18.0	7.57	5.10	2.78	1.44
	1.70V	111	68.8	51.2	30.9	18.4	7.74	5.21	2.84	1.47
	1.65V	112	69.7	51.8	31.3	18.7	7.84	-	-	-
	1.60V	113	70.3	52.3	31.6	18.9	7.92	-	-	-

Long Life series


These VRLA batteries use thicker plates than the standard 4-5 year models. The electrolyte is absorbed by the AGM separators and plates and therefore these batteries can be mounted in any position. The one-way valve allow gases to escape, avoiding excessive pressure build-up in the case of accidentally overcharge.

The pbq Long Life series: a range of standard shaped Long Life batteries with a functional life of 12-years for standby applications in accordance to the EUROBAT "High Performance" specifications.


General Features of the pbq Long Life series

- Absorbent Glass Mat (AGM) technology for efficient gas recombination of up to 99% and freedom.
- from electrolyte maintenance or water adding.
- Not restricted for air transport-complies with IATA/ICAO Special Provision A67
- Can be mounted in any position
- Computer designed lead, calcium tin alloy grid for high power density
- Long service life, float or cyclic applications. Maintenance free operation
- Low self discharge
- Flame retardant ABS, UL94V-0 / 92-2
- International Standard, JIS and DIN
- High Reliability and Good Quality
- Deep Discharge Recovery
- High Power Density


Effect of Temperature on Long term Float Life

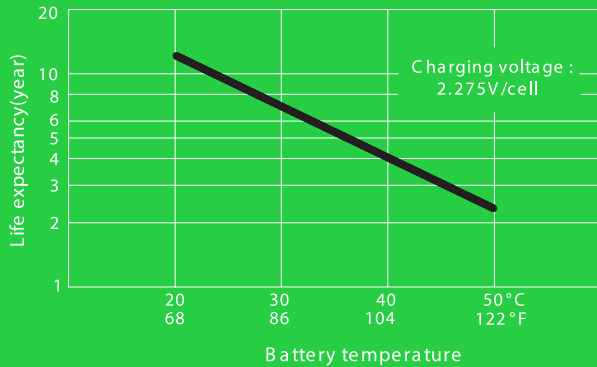


Discharge Time VS. Discharge Current (20°C)

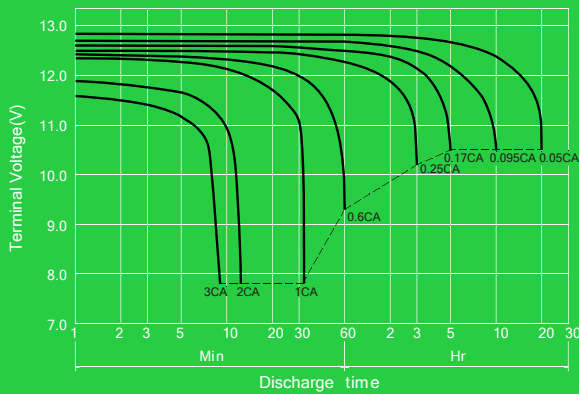

Battery Charging Characteristics

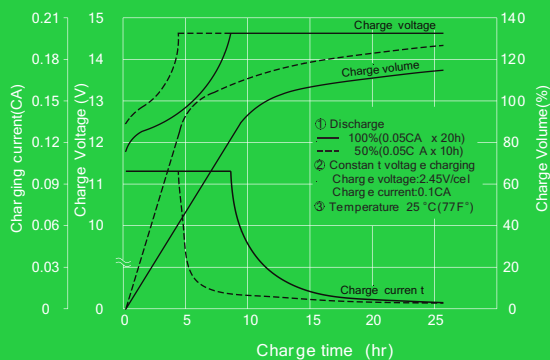

Charging voltage and temperature

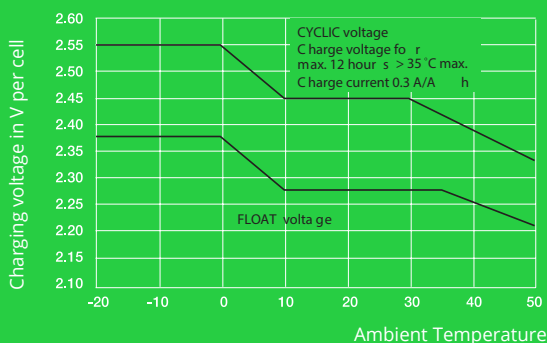

Models available

Model pbq	Capacity in Ah	Dimensions (±2mm) (LxWxH1/H2)	Weight
pbq L 7-12	7	151x65x100mm	2.5 kg
pbq L 9-12	9	151x65x102mm	2.7 kg
pbq L 12-12	12	151x98x101mm	3.7 kg
pbq L 17-12	17	181x77x167mm	5.5 kg
pbq L 28-12	28	168x178x124mm	8.4 kg
pbq L 33-12	33	195x130x160mm	10.7 kg
pbq L 40-12	40	198x167x157mm	13.8 kg
pbq L 55-12	55	229x138x213mm	17.3 kg
pbq L 65-12	65	350x167x179mm	23.4 kg
pbq L 80-12	80	350x167x179mm	22.5 kg
pbq L 100-12	100	330x171x220mm	32 kg
pbq L 120-12	120	410x176x227mm	38 kg
pbq L 150-12	150	482x170x240mm	47 kg
pbq L 200-12	200	522x238x223mm	65 kg
pbq L 230-12	230	520x269x208mm	72.6 kg



Certificates



Features

- Absorbent Glassmat Technology
- Low self discharge
- Classified as non-spillable and Non Dangerous goods by IATA, FAA, ADR, IMDG
- Can be discharged or stored in any position without leakage
- Cannot be charged while the terminal is downward.