


Sonnenschein A512/10 S* data sheet


Artikel-Nr. 0212013



Drawing:

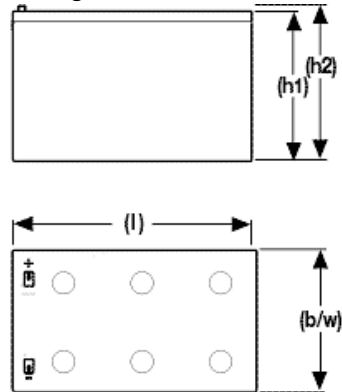

Terminal:



*VdS-approved,

Specifications:

Exide type designation	Part number	Nom. Voltage V	Nominal capacity C ₂₀ 1.75Vpc 20°C Ah	Length (l) max. mm	Width (b/w) max. mm	Height (h1) max. mm	Height top of cover (h1) max. mm	Height over terminals (h2) max. mm	Weight approx. kg	Internal resistance mOhm	Short circuit current A	Max. Load approx. A	Max. perm current 5 secs. A	Terminal	VDS-approved
A512/10 S*	NGA5120010HS0SA	12	10	152.0	98.0	94.5	94.5	98.4	4.00	66	189	80	300	S-4,8	*VdS-approved,

Part numbers not valid for North America, use type for ordering!

Constant-current discharge in A (@ 20 °C):

Part number	Exide type designation	VpC	5min	10min	15min	20min	30min	1h	2h	3h	5h	8h	10h
NGA5120010HS0SA	A512/10S	1.85	30.0	22.0	18.0	15.0	11.2	6.4	3.9	2.8	1.8	1.2	1.0
NGA5120010HS0SA	A512/10S	1.80	33.0	24.0	19.0	16.0	11.9	6.8	4.1	2.9	1.9	1.2	1.0
NGA5120010HS0SA	A512/10S	1.75	35.0	26.0	20.0	17.0	12.3	6.9	4.2	3.0	1.9	1.3	1.0
NGA5120010HS0SA	A512/10S	1.70	37.0	27.0	20.0	17.0	12.6	7.0	4.2	3.0	1.9	1.3	1.0
NGA5120010HS0SA	A512/10S	1.65	39.0	28.0	21.0	17.0	12.7	7.1	4.3	3.0	1.9	1.3	1.0
NGA5120010HS0SA	A512/10S	1.60	42.0	29.0	21.0	17.0	12.8	7.1	4.3	3.0	1.9	1.3	1.0

Constant-power discharge in W/block (@ 20 °C):

Part number	Exide type designation	VpC	3min	5min	10min	15min	20min	30min	45min	1h	1.5h
NGA5120010HS0SA	A512/10S	1.85	335.0	298.0	248.0	195.0	160.0	120.0	98.0	78.0	56.0
NGA5120010HS0SA	A512/10S	1.80	336.0	318.0	261.0	209.0	172.0	128.0	101.0	81.0	59.0
NGA5120010HS0SA	A512/10S	1.75	361.0	346.0	270.0	219.0	179.0	132.0	103.0	83.0	60.0
NGA5120010HS0SA	A512/10S	1.70	385.0	360.0	278.0	226.0	185.0	135.0	103.0	84.0	60.0
NGA5120010HS0SA	A512/10S	1.65	410.0	371.0	283.0	229.0	187.0	136.0	104.0	84.0	61.0
NGA5120010HS0SA	A512/10S	1.60	437.0	381.0	287.0	231.0	188.0	136.0	104.0	85.0	61.0

© 2009 EXIDE Technologies. All rights reserved. Subject to alterations. www.industrialenergy.exide.com



Distributed by

Swiss Point AG | Moospark 10 | 6221 Rickenbach LU
Tel. +41 62 721 82 82 | Fax +41 62 721 82 20
info@swiss-point.ch | www.swiss-point.ch

swisspoint
akkus • batterien • zubehör