

ALKALINE-MANGANESE DIOXIDE BATTERY



Artikel Nummer **2010015**


size: 9V (6LR61) PC1604

KEY FEATURES

- Reliable Performance
- Excellent resistance to corrosion
- Designed to meet all major quality, safety and environmental standards:
 - Safety: IEC 60086-5
 - ANSI C 18.1M, Part-2
 - EU Battery Directive
 - Quality: ISO 14001 and 9001, Duracell World Class Continuous Improvement Program

TYPICAL APPLICATIONS

- Carbon Monoxide Detectors
- Smoke Detectors
- Multimeters
- Medical Devices
- Microphones

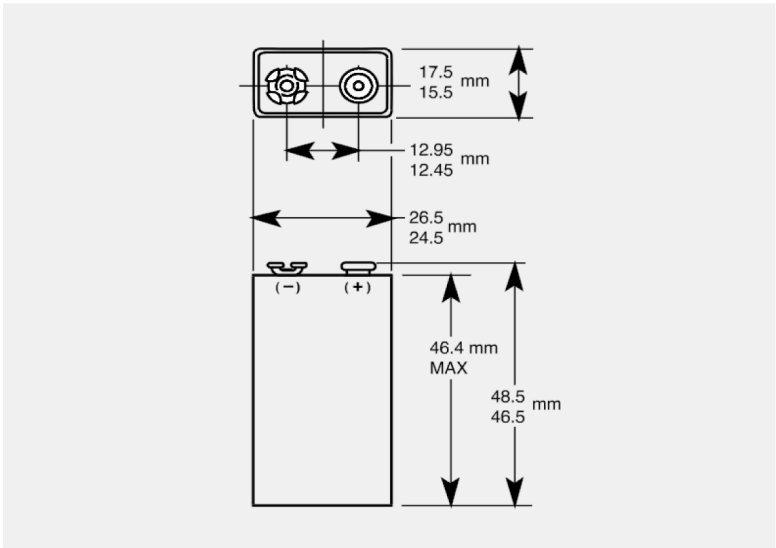

Dimensions shown are IEC standards

ELECTRICAL CHARACTERISTICS

▪ Nominal capacity (2 mA Cont., 5V cut-off)	673 mAh
▪ Typical Voltage (at + 20 °C)	9 V
▪ AC Impedance @ 1kHz	1,700 mΩ

PHYSICAL CHARACTERISTICS

▪ Typical weight	45.0 g (1.6 oz)
▪ Typical volume	22.8 cm ³ (1.4 in ³)
▪ Terminals	Miniature snap

OPERATING & STORAGE CONDITIONS


▪ Operating temperature range	-20°C to 54°C (-4°F to 130°F)
▪ Recommended Storage (storage area should be clean, cool, dry and ventilated)	5°C to 30°C (41°F to 86° F)

Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy/service life that the battery will provide for various load conditions.


This data is subject to change. Performance information is typical. Contact Duracell for the latest information.

TYPICAL PERFORMANCE


Constant Current

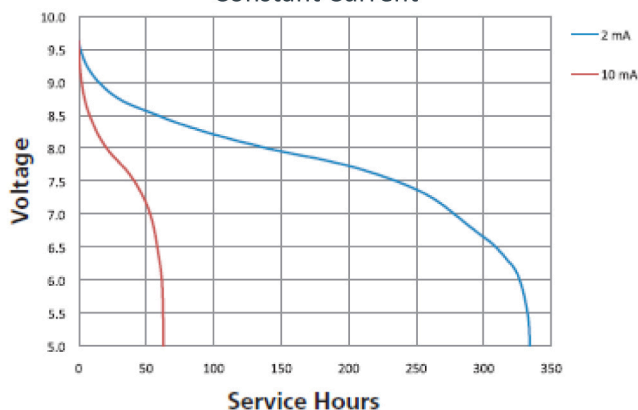


Constant Current

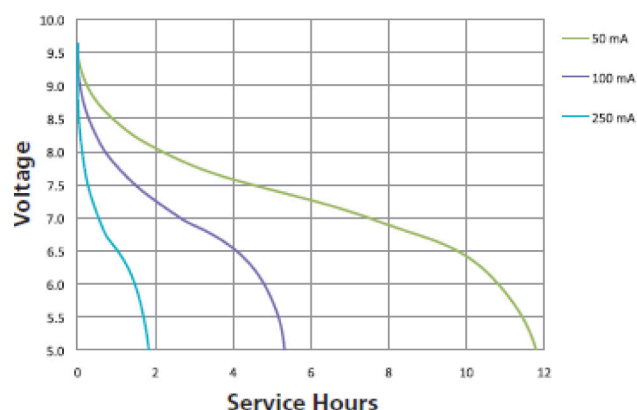


Constant Power

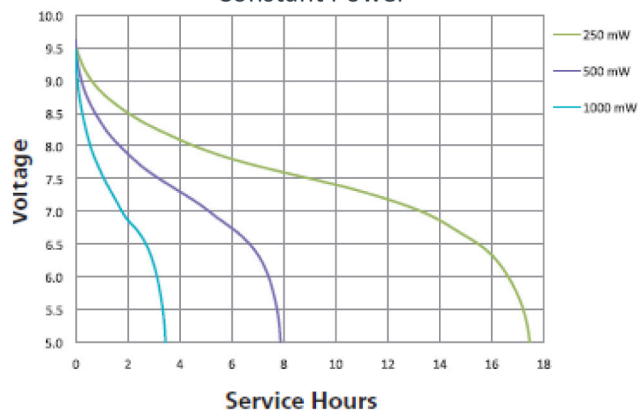


Constant Power

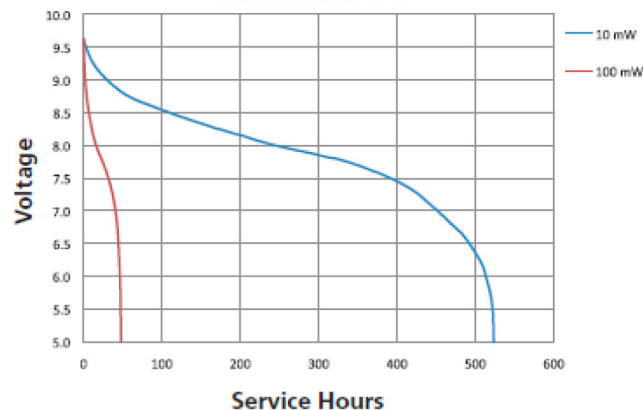

Constant Resistance

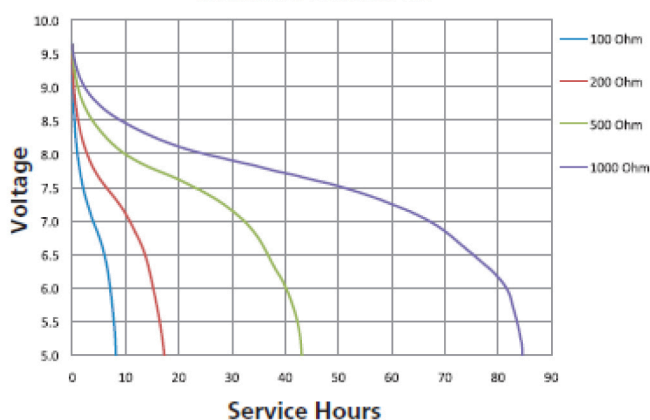

Constant Current – 50 mA

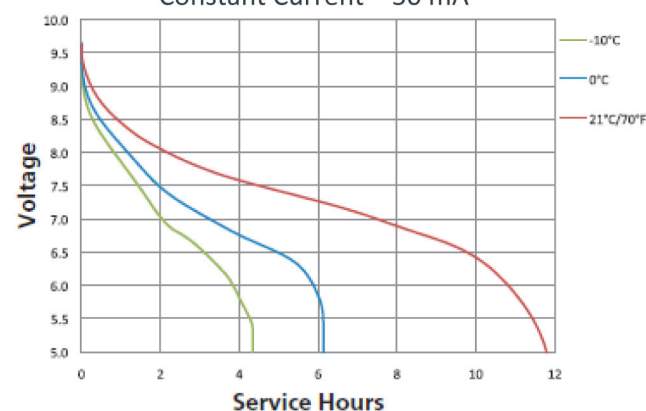

Distributed by:

swisspoint
akkus • batterien • zubehör

Moospark 10, 6221 Rickenbach LU

Telefon +41 62-721 82 82, Telefax +41 62-721 82 80

info@swiss-point.ch, www.swiss-point.ch

Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy/service life that the battery will provide for various load conditions.

This data is subject to change. Performance information is typical. Contact Duracell for the latest information.