
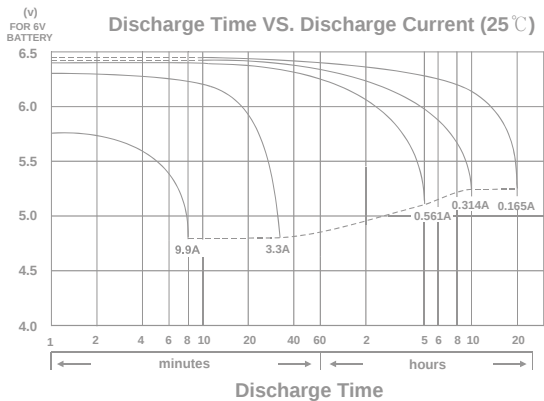
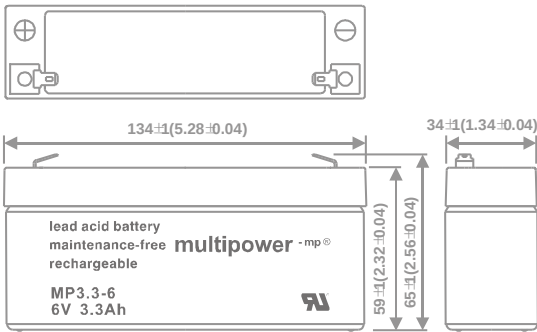


RECHARGEABLE SEALED LEAD ACID BATTERY

SPECIFICATION



MP3,3-6 (Artikel-Nr. 2003877)

Nominal Voltage(V) 6V

Nominal Capacity				
20 hour rate	(0.165A	to	5.25V)	3.3Ah
10 hour rate	(0.314A	to	5.25V)	3.14Ah
5 hour rate	(0.561A	to	5.1V)	2.81Ah
1 C	(3.3A	to	4.8V)	1.87Ah
3 C	(9.9A	to	4.8V)	1.32Ah

Weight Approx. 700g(1.54Lbs.)

Internal Resistance (at 1KHz) Approx. 18 mΩ

Maximum Discharge Current for
5 seconds: 49.5A

Charging Methods at 25°C(77°F)

Cycle use:
Charging Voltage 7.20 to 7.50V
Coefficient -5.0mv/°C/cell
Maximum Charging Current: 0.99A

Standby use:
Float Charging Voltage 6.75 to 6.90V
Coefficient -3.0mv/°C/cell

Operating Temperature Range

Charge -15°C(5°F) to 40°C(104°F)
Discharge -15°C(5°F) to 50°C(122°F)
Storage -15°C(5°F) to 40°C(104°F)

Charge Retention (shelf life) at 20°C(68°F)


1 month	92%
3 month	90%
6 month	80%

Case Material ABS
(UL94 HB flame retardant case / cover)


Terminal F1(Faston Tab 187)

CHARACTERISTIC


Effect of Temperature on Capacity 25°C(77°F)

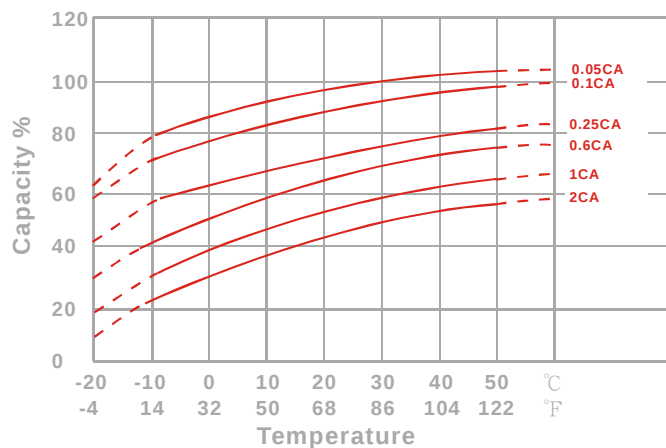

Capacity Retention Characteristic

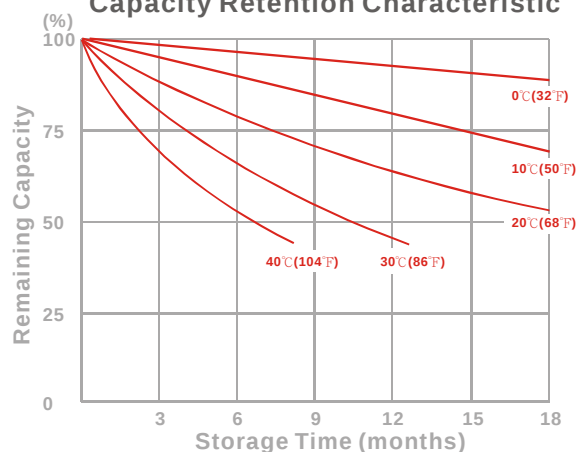

Trickle (or float) Service Life

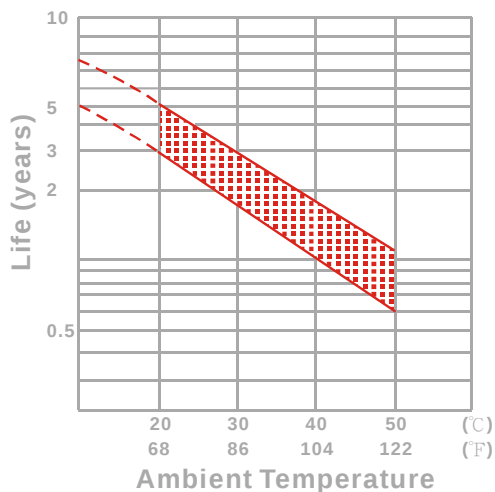

Cycle Service Life

