


- Technical data sheet -

LR6 ALKALINE ACE

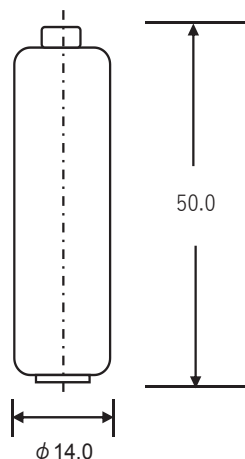

CEI/IEC designation	-----	LR6
System	-----	L(Alkaline)
Nominal voltage	-----	1.5V
Maximum intensity	-----	1500mA
Dimensions:		
	Diameter	----- 14.0mm
	Height	----- 50.0mm
Approximate volume	-----	7.4cm ³
Approximate weight	-----	23g
Self life*	-----	5 years

SERVICE OUTPUT					
APPLICATIONS	DISCHARGE CONDITIONS			TYPICAL DURATIONS (At 20°C)	
	Resistance	Daily period	End point	Initial	At 1 year*
Pulse Test	1.8 Ω	15s/1min : 24 h	0.9V	650 Pulses	Higher than 90% of Initial value (CEI/IEC60086-2)
Toy	3.9 Ω	1h	0.8V	7h30min	
Tape recorder	10 Ω	1h	0.9V	18h	
Radio	43 Ω	4h	0.9V	86h	

Remarks:

- Mercury and cadmium are excluded in the composition of all these batteries compounds.
- This battery is made with a Nickel-plated steel can with a rigorously fluid-tight seal, and with an insulating multilayer cover on all the lateral surface.
- This data sheet complies with the International Electro technical Commission standards, IEC 60086-1 and 60086-2 (These standards should be consulted if some information can not be found in this data sheet).

*Normal conditions storage, as per CEI/IEC 60086-1.

Dec 2019

Distributed by: **Swiss Point AG**

Moospark 10 | 6221 Rickenbach LU | T +41 62 721 82 82 | F +41 62 721 82 80